

SILVERLINK 600



ESLR6C - Lincat Silverlink 600 Electric Freestanding Oven Range -Castors at Rear - 4 Plates - W 600 mm - 11.0 kW Produce a wide range of delicious food with the large capacity fan assisted oven and four hotplates.

- Compact footprint suitable for small to medium sized kitchens, where space is at a premium
- Powerful 4kW fan assisted oven provides uniform heat distribution and consistent cooking
- Four hotplates 2 x 2.0kW, 2 x 1.5kW with sixposition control knob for each plate - higher power for sautéing at the front, lower power to the rear ideal for simmering
- Fast oven heat up to 250°C in under 9 minutes
- Can be wired as either single or three phase, to suit both install requirements

- Double insulated doors, side and back panels providing safer operation, greater efficiency and economy
- Oven and hob on single electricity supply only one electricity source needed
- Fully pressed and sealed hob, and removable oven base and shelf supports for easy cleaning and maintenance
- Castors at rear to enable unit to be pulled out for deeper cleans

Specifications

Summary Power and Performance Total Power kW Brand Lincat Range Temperature Range °C 50-250 Silverlink 600 IP Rating **Power Type** Electric IP34 **Unit Type** Free-standing Cooking Area (Width x Depth) mm 600 x 600 Available in UK Only **Temperature Control** Mechanical **UK Warranty** 2 Years Parts and Labour Warranty Rating per Hob kW 2×2.0 , 2×1.5 **Export Warranty** Contact your local dealer Oven Rating kW 4.0 5056105121336

Key Specifications

Weights and Dimensions

Unit Height (External) mm

Unit Width (External) mm

Unit Depth (External) mm

Shelf Dimensions Width mm

Shelf Dimensions Depth mm

Height (Internal) mm

Width (Internal) mm

Depth (Internal) mm

Hob Dimensions mm

Net Weight Kg

Number of Shelves included	2
Number of Shelf Positions	4
Number of Hobs	4
Shape of Hob	Round

932

600

670

428

470

350

455

335

60

600 x 600

Supply Connections

Requires Installation	Yes
Requires Electrical Supply	Yes
UK 3 Pin Plug	No
Requires Hardwiring	Yes
Electrical Supply Rating Watts	11,000
Single Phase Amps	47.8
Single Phase Voltage	230
Three Phase Amps	L1=17.4; L2=15.2; L3=15.2

Three Phase Voltage 400

Product Code: ESLR6C Page Number: 1 Print Date: 03/02/2020



SILVERLINK 600


Shipping


Packed Weight Kg72.5Packed Height cm110Packed Width cm70Packed Depth cm80

Available Accessories

SLR6/SB SPLASHBACK SLR6

Technical Picture

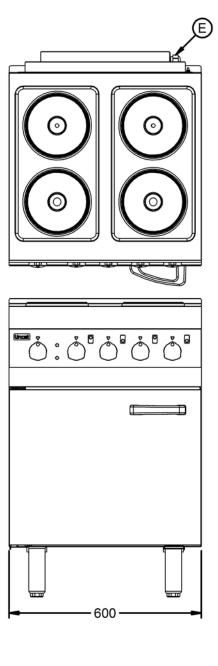

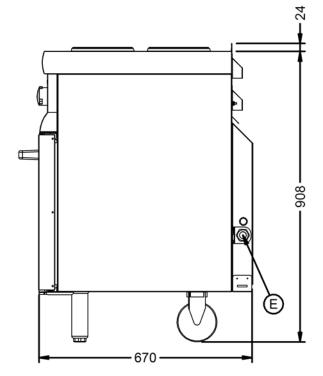







Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

-

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm



Product Code: ESLR6C Page Number: 3 Print Date: 03/02/2020