## Lincat frifri





## LCOT - Lincat Lynx 400 Tall Convection Oven -W 495 mm - D 570 mm -2.5 kW

- Powerful fan assisted cooking for uniform heat, and consistent cooking results
- Powerful 2.5kW oven allows rapid heat up time
- Accommodates 4 x 2/3 gastronorms placed directly on shelf runners
- Easy plug and play operation 13A plug
- ✓ Temperature range 50 250°C

Lynx 400 Series Slim Convection Oven 2.5kW accommodates 4 x 2/3 gastronorms.

- Simple dial controls with 55 minute timer enabling accurate cooking time
- Side opening door with double glazed glass viewing panel, for energy efficiency, and cool touch door
- Two removable chromed rod shelves
- User-replaceable inner door glass, light bulb and door seal

### Specifications

Su	m	m	a	ry	

Brand Range Power Type Unit Type Available in UK Only UK Warranty Export Warranty GTIN

#### **Key Specifications**

Stackable				
Feet Height/Type				
Continuous Plug-In Door Seal				
Removable Inner Door Glass				
Handle Type				
Vented Door				
Reversible Door				
Door Type				
Phased Cooking				
Shelf Timer(s) (Number)				
Grill Element/Mode				
Core Temp Probe				
Steam Injection				
Fan(s) Speed				
Fan(s) Type				
Number of Fan(s)				
Removeable Shelf Guides				
Manual Mode				
Programmable				
Timer Type				
Number of Shelves included				
Number of Shelf Positions				
Type of Lighting				
Construction/Finish				
GN Compatible				

Lincat Lynx 400 Electric Counter-top No 2 Years Parts and Labour Warranty Contact your local dealer 5056105118695

No

No Yes Grab Yes No Left Hinged No No No No 1

14mm/Rubber

Single direction

Filament Bulb Stainless Steel Yes

1 Yes Yes No Mechanical 2 4

#### **Power and Performance**

Total Power kW Temperature Range °C IP Rating Controls Position Temperature Control Timer Range mins 2.5 50-250 IP24 Lower front Mechanical

#### Capacity

Gastronorm Capacity Shelf Spacing mm Capacity Litres 4 x GN2/3 80 53.64

# lincat frifri


## **LYNX 400**

Weights and Dimensions		Supply Connections		
Unit Height (External) mm	520	Requires Installation	No	
Unit Width (External) mm	495	Requires Electrical Supply	Yes	
Unit Depth (External) mm	570	UK 3 Pin Plug	Yes	
Height (Internal) mm	362	Requires Hardwiring	No	
Width (Internal) mm	380	Electrical Supply Rating Watts	2,500	
Depth (Internal) mm	390	Single Phase Amps	10.9	
Shelf Dimensions Width mm	378	Single Phase Voltage	230	
Shelf Dimensions Depth mm	326	USB Port	No	
Net Weight Kg	29.3			
Shipping				
Shipping				
Packed Weight Kg	38.3			

#### Packed Weight Kg

Fackeu weight Ng	38.3
Packed Height cm	76.5
Packed Width cm	68.5
Packed Depth cm	81.3

### **Technical Picture**

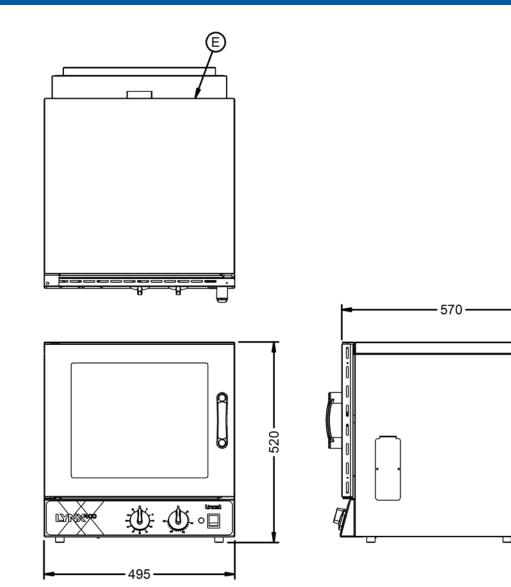

E



## Lincat frifri

#### Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



#### Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

#### **Export Customers**

Tel: +44 1522 503250 Email: export@lincat.co.uk

#### **Opening Hours**

Monday – Friday: 8.30am – 5pm